


T6、T7系列双联泵

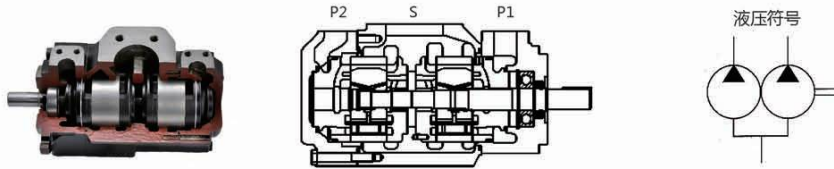


型号说明

T6CC	-025	-017	-1	R	02	-C	1	10
系列号	轴端泵排量代号	盖端泵排量代号	轴伸形式	旋转方向	油口位置 设计号	密封等级	密封等级	油口尺寸
T7BB T7BBS	B02, B03, B04, B05, B06, B07, B08, B10, B12, B15	B02, B03, B04, B05, B06, B07, B08, B10, B12, B15	见轴伸尺寸	(从泵的轴端看) R-顺时针旋转 L-逆时针旋转	见下图	C	1-S1, 丁腈橡胶 5-S5, 氟橡胶	00, 01, 见安装连接 尺寸
T67CB	003/B03, 005/B05, 006/B06, 008/B08, 010/B10, 012/B12, 014/B14, 017/B17, 020/B20, 022/B22, 025/B25, 028/B28, 031/B31	B02, B03, B04, B05, B06, B07, B08, B10, B12, B15						无此选项
T6CC	003/B03, 005/B05, 006/B06, 008/B08, 010/B10, 012/B12, 014/B14, 017/B17, 020/B20, 022/B22, 025/B25, 028/B28, 031/B31	003/B03, 005/B05, 006/B06, 008/B08, 010/B10, 012/B12, 014/B14, 017/B17, 020/B20, 022/B22, 025/B25, 028/B28, 031/B31						00, 01, 10, 11, 见安装连接尺寸
T67DB	014/B14, 017/B17, 020/B20, 024/B24, 028/B28, 031/B31, 035/B35, 038/B38, 042/B42, 045/B45, 050/B50, 061	B02, B03, B04, B05, B06, B07, B08, B10, B12, B15						无此选项
T7DB	B14, B17, B20, B22, B24, B28, B31, B35, B38, B42, 045/B45, 050/B50	B02, B03, B04, B05, B06, B07, B08, B10, B12, B15						
T6DC	014/B14, 017/B17, 020/B20, 024/B24, 028/B28, 031/B31, 035/B35, 038/B38, 042/B42, 045/B45, 050/B50, 061	003/B03, 005/B05, 006/B06, 008/B08, 010/B10, 012/B12, 014/B14, 017/B17, 020/B20, 022/B22, 025/B25, 028/B28, 031/B31						
T67DC	B14, B17, B20, B22, B24, B28, B31, B35, B38, B42, 045/B45, 050/B50	003/B03, 005/B05, 006/B06, 008/B08, 010/B10, 012/B12, 014/B14, 017/B17, 020/B20, 022/B22, 025/B25, 028/B28, 031/B31						
T67EB	042, 045, 050, 052, 057, 062, 066, 072, 085	B02, B03, B04, B05, B06, B07, B08, B10, B12, B15						
T6EC	042, 045, 050, 052, 057, 062, 066, 072, 085	003/B03, 005/B05, 006/B06, 008/B08, 010/B10, 012/B12, 014/B14, 017/B17, 020/B20, 022/B22, 025/B25, 028/B28, 031/B31						
T6ED	042, 045, 050, 052, 057, 062, 066, 072, 085	014/B14, 017/B17, 020/B20, 024/B24, 028/B28, 031/B31, 035/B35, 038/B38, 042/B42, 045/B45, 050/B50, 061						
T67ED	042, 045, 050, 052, 057, 062, 066, 072, 085	B14, B17, B20, B22, B24, B28, B31, B35, B38, B42, 045/B45, 050/B50						


003/B03 :排量代号中0表示单转向型配油盘结构, B表示双转向型配油盘结构
与相应系列、规格的T6、T7单泵性能参数一致, 详见T6、T7系列单泵的性能参数

油口位置(从泵的轴端看)


T7BB、T7BBS
T67CB、T6CC
T67DB、T7DB
T6DC、T67DC
T67EB、T6EC

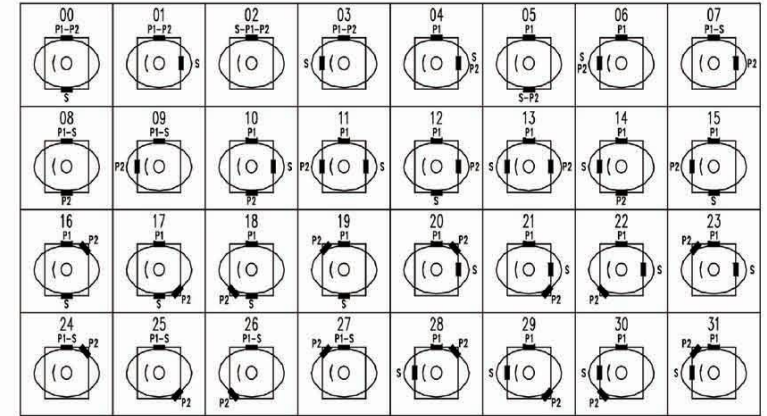

T6ED、T67ED

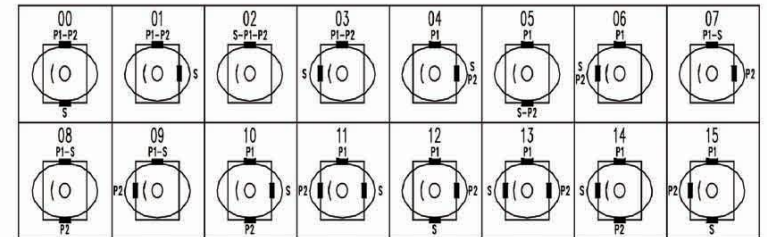


安装连接尺寸

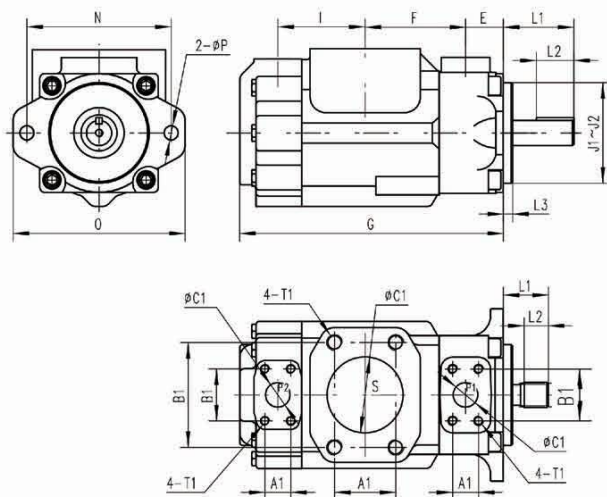

	T6CC	T6DC, T67DC
E	38.1	38.1
F	101.6	114.3
G	265.6	286.0
I	88.2	109.5
J1	101.60	127.00
J2	101.55	126.95
N	146.0	181.0
O	174.5	212.4
ØP	14.3	17.5
L3	9.7	12.7
	T6EC	T6ED, T67ED
E	52.3	52.3
F	118.5	133.5
G	331.6	361.0
I	136.7	148.2
J1	127.00	127.00
J2	126.95	126.95
N	181.0	181.0
O	213.0	213.0
ØP	17.5	17.5
L3	12.7	12.7

油口			法兰	安装尺寸(mm)				
				A1	B1	ØC1	D1	T1 口螺纹
T6CC	P1	1"	F08	26.2	52.4	25.4	76.2	3/8" -16UNCx19.0
	P2	01-11:3/4"	F06	22.2	47.6	19.0	74.7	3/8"-16UNCx19.0
		00-10:1"	F08	26.2	52.4	25.4	76.2	
	S	10-11:2-1/2"	F20	50.8	88.9	63.5	84.1	1/2" -13UNCx23.9
		00-01:3"	F24	61.9	106.4	76.2	84.1	5/8"-11UNCx28.4
T6DC, T67DC	P1	1-1/4"	F10	30.2	58.7	31.8	82.6	7/16" -14UNCx22.3
	P2	1"	F08	26.2	52.4	25.4	74.7	3/8" -16UNCx19.0
	S	3"	F24	61.9	106.4	76.2	88.9	5/8" -11UNCx28.4
T6EC	P1	1-1/2"	F12	35.7	69.9	38.1	98.6	1/2" -13UNCx23.4
	P2	1"	F08	26.2	52.4	25.4	74.7	3/8" -16UNCx19.0
	S	3-1/2"	F28	69.9	120.7	88.9	102.4	5/8"-11UNCx29.5
T6ED, T67ED	P1	1-1/2"	F12	35.7	69.9	38.1	98.6	1/2" -13UNCx23.4
	P2	1-1/4"	F10	30.2	58.7	31.8	82.6	7/16" -14UNCx24.0
	S	4"	F32	77.8	130.2	101.6	102.4	5/8"-11UNCx30.0


安装连接尺寸

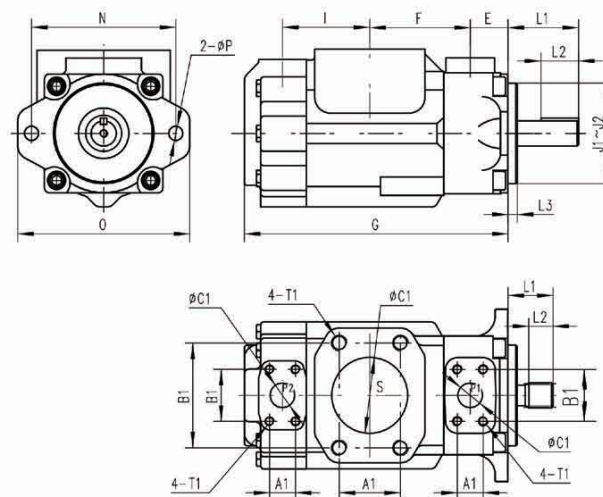

	T7BB	T7BS	T67CB
E	38.1	38.1	38.1
F	101.6	101.6	101.6
G	262.2	262.2	265.6
I	98.6	98.6	88.2
J1	100.00	101.60	101.60
J2	99.97	101.55	101.55
N	140.0	146.0	146.0
O	174.5	174.5	174.5
øP	14.0	14.3	14.3
L3	9.7	9.7	9.7
	T67DB, T7DB	T67EB	
E	38.1	52.3	
F	114.3	118.5	
G	286.0	331.6	
I	109.5	136.7	
J1	127.00	127.00	
J2	126.95	126.95	
N	181.0	181.0	
O	212.4	213.0	
øP	17.5	17.5	
L3	12.7	12.7	

油口			法兰	安装尺寸(mm)				
				A1	B1	øC1	D1	T1 口螺纹
T7BB, T7BS	P1	01:3/4"	F06	22.2	47.6	19.0	76.2	3/8"-16UNCx19.0
		00:1"	F08	26.2	52.4	25.4	76.2	
	P2	3/4"	F06	22.2	47.6	19.0	76.2	3/8" -16UNCx19.0
	S	2-1/2"	F20	50.8	88.9	63.5	84.1	1/2" -13UNCx23.9
T67CB	P1	1"	F08	26.2	52.4	25.4	76.2	3/8" -16UNCx19.0
	P2	3/4"	F06	22.2	47.6	19.0	76.2	3/8"-16UNCx19.0
	S	2-1/2"	F20	50.8	88.9	63.5	84.1	1/2" -13UNCx23.9
T67DB, T7DB	P1	1-1/4"	F10	30.2	58.7	31.8	82.6	7/16" -14UNCx22.3
	P2	3/4"	F06	22.2	47.6	19.0	76.2	3/8" -16UNCx19.0
	S	3"	F24	61.9	106.4	76.2	88.9	1/2" -13UNCx23.9
T67EB	P1	1-1/2"	F12	35.7	69.9	38.1	98.6	1/2"-13UNCx23.4
	P2	3/4"	F06	22.2	47.6	19.0	76.2	3/8" -16UNCx19.0
	S	3-1/2"	F28	69.9	120.7	88.9	102.4	5/8"-11UNCx24.0

安装连接尺寸

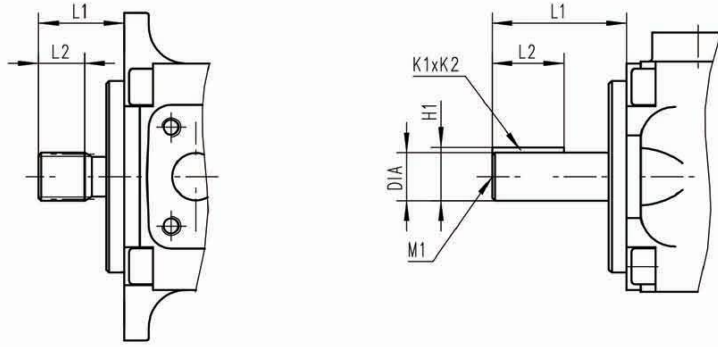


轴伸

型号	轴伸代号	最大扭矩 N·m	L1	L2	DIA	K1XK2	H1	M1
T7BB	5	•	70.0	40.0	25.006/24.993	8.00x7.00	28.22	—
T7BBS	1	238	58.2	31.7	22.225/22.200	4.76x4.71	24.53	—
	2	357	71.4	38.1	25.400/25.370	6.35x6.30	28.22	M8x16
	3	•	40.7	24.5	SAE J498b 1 级, 径节 16/32, 13牙			—
	4	•	45.5	24.5	SAE J498b 1 级, 径节 16/32, 15牙			—
T67CB、T6CC	1	238	58.2	31.7	22.225/22.200	4.76x4.71	24.53	—
	2	357	71.4	38.1	25.400/25.370	6.35x6.30	28.22	M8x16
	3	545	45.5	24.5	SAE J498b 1 级, 径节 16/32, 15牙			—
	5	343	40.7	24.5	SAE J498b 1 级, 径节 16/32, 13牙			—
T67DB、T7DB、T6DC、T67DC	1	721	83.6	49.3	31.750/31.700	7.94x7.89	35.27	M10x20
	2	577	73.2	38.1	31.750/31.700	7.94x7.89	35.27	—
	3	•	55.7	38.0	SAE J498b 1 级, 径节 12/24, 14牙			—
	4	•	77.7	48.0	SAE J498b 1 级, 径节 12/24, 14牙			—
	5	•	83.4	60.0	34.900/34.875	7.94x7.89	38.42	M8x16
T67EB、T6EC、T6ED、T67ED	1	•	90.9	50.8	38.100/38.050	9.52x9.47	42.36	M10x20
	2	577	61.9	38.1	31.750/31.700	7.94x7.89	35.27	—
	3	•	55.7	38.0	SAE J498b 1 级, 径节 12/24, 14牙			—
	4	•	62.2	31.5	SAE J498b 1 级, 径节 12/24, 17牙			—

*能在最大流量、最大压力下工作

T6系列三联泵

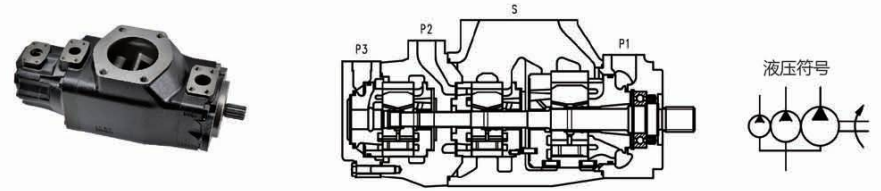


型号说明

T6DCC	-042	-017	-010	-1	R	02	-A	1	01
系列号	轴端泵排量代号	中间泵排量代号	盖端泵排量代号	轴伸形式	旋转方向	油口位置	设计号	密封等级	油口尺寸
T67DBB	014/B14, 017/B17, 020/B20, 024/B24, 028/B28, 031/B31, 035/B35, 038/B38, 042/B42, 045/B45, 050/B50, 061	802, 803, 804, 805, 806, 807, 808, 810, 812, 815	802, 803, 804, 805, 806, 807, 808, 810, 812, 815	见轴伸尺寸	(从泵的轴端看) R-顺时针旋转 L-逆时针旋转	见下图	A	1-S1, 丁腈橡胶 氟橡胶	无此选项
T67DCB	014/B14, 017/B17, 020/B20, 024/B24, 028/B28, 031/B31, 035/B35, 038/B38, 042/B42, 045/B45, 050/B50, 061	003/803, 005/805, 006/806, 008/808, 010/810, 012/812, 014/B14, 017/B17, 020/B20, 022/B22, 025/B25, 028/B28, 031/B31	802, 803, 804, 805, 806, 807, 808, 810, 812, 815						无此选项
T6DCC	014/B14, 017/B17, 020/B20, 024/B24, 028/B28, 031/B31, 035/B35, 038/B38, 042/B42, 045/B45, 050/B50, 061	003/803, 005/805, 006/806, 008/808, 010/810, 012/812, 014/B14, 017/B17, 020/B20, 022/B22, 025/B25, 028/B28, 031/B31	003/803, 005/805, 006/806, 008/808, 010/810, 012/812, 014/B14, 017/B17, 020/B20, 022/B22, 025/B25, 028/B28, 031/B31						00, 01, 见安装连接尺寸
T67DBS	014/B14, 017/B17, 020/B20, 024/B24, 028/B28, 031/B31, 035/B35, 038/B38, 042/B42, 045/B45, 050/B50, 061	014/B14, 017/B17, 020/B20, 024/B24, 028/B28, 031/B31, 035/B35, 038/B38, 042/B42, 045/B45, 050/B50, 061	802, 803, 804, 805, 806, 807, 808, 810, 812, 815						无此选项
T6DDCS	014/B14, 017/B17, 020/B20, 024/B24, 028/B28, 031/B31, 035/B35, 038/B38, 042/B42, 045/B45, 050/B50, 061	014/B14, 017/B17, 020/B20, 024/B24, 028/B28, 031/B31, 035/B35, 038/B38, 042/B42, 045/B45, 050/B50, 061	003/803, 005/805, 006/806, 008/808, 010/810, 012/812, 014/B14, 017/B17, 020/B20, 022/B22, 025/B25, 028/B28, 031/B31						00, 01, 见安装连接尺寸
T67EDB	042, 045, 050, 052, 057, 062, 066, 072, 085	014/B14, 017/B17, 020/B20, 024/B24, 028/B28, 031/B31, 035/B35, 038/B38, 042/B42, 045/B45, 050/B50, 061	802, 803, 804, 805, 806, 807, 808, 810, 812, 815						无此选项
T6EDC T6EDCS	042, 045, 050, 052, 057, 062, 066, 072, 085	014/B14, 017/B17, 020/B20, 024/B24, 028/B28, 031/B31, 035/B35, 038/B38, 042/B42, 045/B45, 050/B50, 061	003/803, 005/805, 006/806, 008/808, 010/810, 012/812, 014/B14, 017/B17, 020/B20, 022/B22, 025/B25, 028/B28, 031/B31						00, 01, 见安装连接尺寸


003/803 :排量代号中0表示单转向型配油盘结构, B表示双转向型配油盘结构与相应系列、规格的T6、T7单泵性能参数一致, 详见T6、T7系列单泵的性能参数

油口位置(从泵的轴端看)

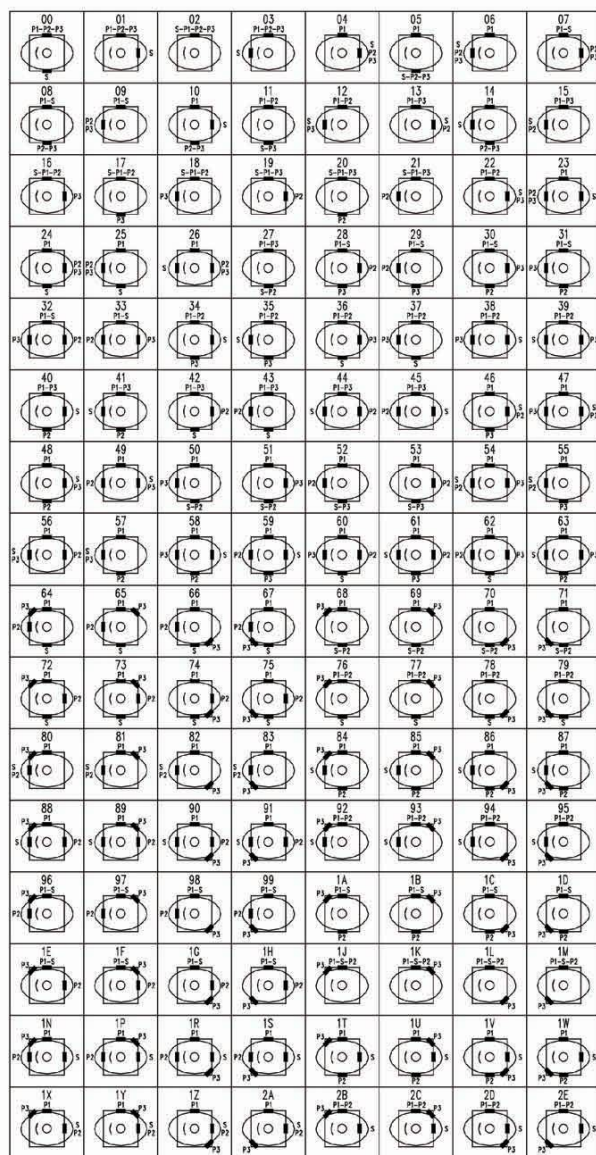

T67DBB
T6DCC
T6DDCS
T6EDCS
T67DCB
T67DDBS
T67EDB
T6EDC

安装连接尺寸

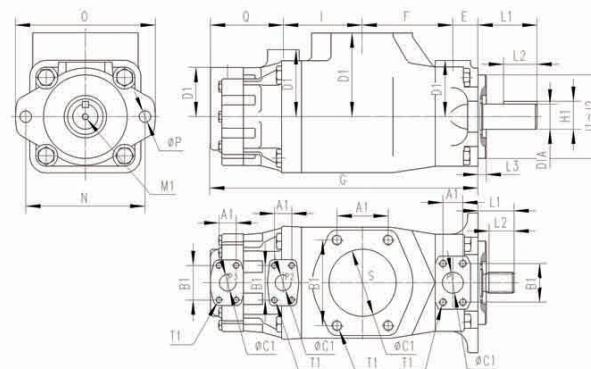

T67DBB、T67DCB、T6DCC

E	38.1
F	138.0
G	404.0
I	119.3
J1	127.00
J2	126.95
N	181.0
O	212.4
øP	17.5
Q	84.4
L3	12.7


轴伸

型号	轴伸代号	最大扭矩 N·m	L1	L2	D1A	K1XK2	H1	M1
T67DBB、T67DCB、 T6DCC	1	721	83.6	49.3	31.750/31.700	6.35x6.30	34.6	—
	2	1108	89.7	50.8	38.100/38.075	9.52x9.47	42.4	—
	3	•	55.2	38.0	SAE J498b 1级，径节12/14，14牙			—
	4	•	61.0	31.5	SAE J498b 1级，径节 12/24，17牙			—
T6DCC	6	•	76.0	48.0	SAE J498b 1级，径节12/14，14牙			—

*能在最大流量、最大压力下工作

油口			法兰	安装尺寸(mm)				
				A1	B1	øC1	D1	T1 口螺纹
T67DBB T67DCB	P1	1-1/4"	F10	30.2	58.7	31.8	82.6	7/16" -14UNCx22.3
	P2	1"	F08	26.2	52.4	25.4	101.6	3/8" -16UNCx19.0
	P3	3/4"	F06	22.2	47.6	19.0	74.7	3/8" -16UNCx19.0
	S	4"	F32	77.8	130.2	101.6	127	5/8" -11UNCx30.0
T6DCC	P1	1-1/4"	F10	30.2	58.7	31.8	82.6	7/16" -14UNCx22.3
	P2	1"	F08	26.2	52.4	25.4	101.6	3/8" -16UNCx19.0
	P3	1 :3/4"	F06	22.2	47.6	19.0	74.7	3/8" -16UNCx19.0
		00:1"	F08	26.2	52.4	25.4		
	S	4"	F32	77.8	130.2	101.6	127	5/8" -11UNCx30.0

安装连接尺寸

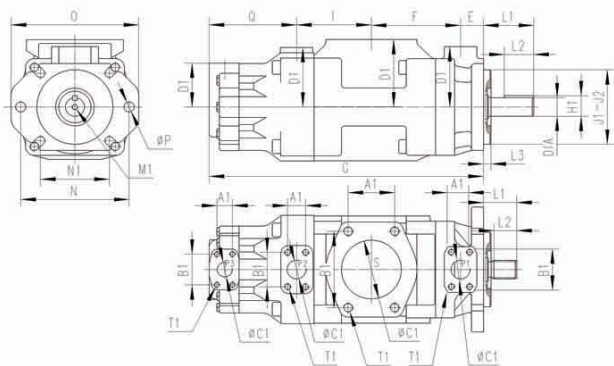

T67DDBS、T6DDCS

E	38.1
F	148.5
G	455.0
I	125.0
J1	127.00
J2	126.95
N	181.0
N1	114.5
O	213.0
ØP	17.5
Q	120.0
L3	12.7


轴伸

型号	轴伸代号	最大扭矩 N·m	L1	L2	DIA	K1xK2	H1	M1
T67DDBS、T6DDCS	1	686	84.0	49.3	31.750/31.700	7.94x7.89	35.27	M10x20
	2	1148	91.0	50.8	38.100/38.075	9.52x9.47	42.4	M10x20
	5	883	84.0	60.0	34.900/34.875	7.94x7.89	38.42	M10x20
	3	971	56.0	38.0	SAE J498b 1 级，径节 12/24, 14 牙		—	
	4	•	46.0	31.5	SAE J498b 1 级，径节 12/24, 17 牙		—	

*能在最大流量、最大压力下工作

油口			法兰	安装尺寸(mm)				
				A1	B1	ØC1	D1	T1 口螺纹
T67DDBS	P1	1-1/4"	F10	30.2	58.7	31.8	82.6	7/16" -14UNCx22.3
	P2	1-1/4"	F10	30.2	58.7	31.8	101.6	7/16" -14UNCx22.3
	P3	3/4"	F06	22.2	47.6	19.0	74.7	3/8" -16UNCx19.0
	S	4"	F32	77.8	130.2	101.6	115.0	5/8" -11UNCx30.0
T6DDCS	P1	1-1/4"	F10	30.2	58.7	31.8	82.6	7/16" -14UNCx22.3
	P2	1-1/4"	F10	30.2	58.7	31.8	101.6	7/16" -14UNCx22.3
	P3	01 :3/4"	F06	22.2	47.6	19.0	74.7	3/8" -16UNCx19.0
		00 :1"	F08	26.2	52.4	25.4		
	S	4"	F32	77.8	130.2	101.6	115.0	5/8" -11UNCx30.0

安装连接尺寸

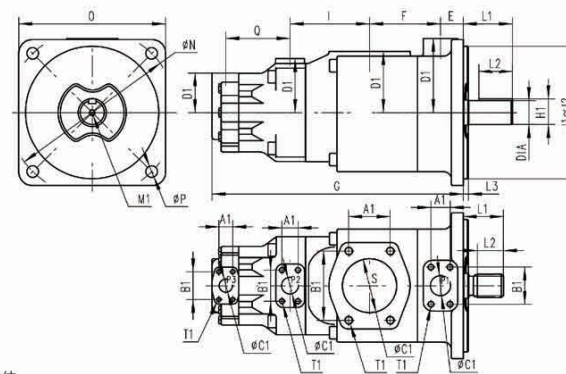

T6EDC	
E	42.9
F	133.3
G	468.0
I	148.4
J1	250h8
J2	250h8
N	315.0
O	273.0
ØP	22.0
Q	120.0
L3	9
T67EDB、T6EDCS	
E	42.9
F	133.3
G	468.0
I	148.4
J1	165.10
J2	165.05
N	315.0
O	273.0
ØP	22.0
Q	120.0
L3	9

轴伸

型号	轴伸代号	最大扭矩 N·m	L1	L2	DIA	K1xK2	H1	M1
T67EDB、T6EDC、T6EDCS	1	•	92.0	63.0	45h7	14h7x9	48.5	M10x20
T6EDCS	2	•	100.0	63.5	44.45/44.40	11.11x11.06	49.3	1/2-UNCx24
	3	•	75.0	48.8	SAE J498b 1 级，径节8/16, 13牙		—	

*能在最大流量、最大压力下工作

油口			法兰	安装尺寸(mm)				
				A1	B1	ØC1	D1	T1 口螺纹
T67EDB	P1	1-1/2"	F12	35.7	69.9	37.1	139.7	1/2"-13UNCx30.0
	P2	1-1/4"	F10	30.2	58.7	31.8	101.6	7/16" -14UNCx24.0
	P3	3/4"	F06	22.2	47.6	19.0	74.7	3/8" -16UNCx19.0
	S	4"	F32	77.8	130.2	101.6	115.0	5/8" -11UNCx30.0
T6EDC、T6EDCS	P1	1-1/2"	F12	35.7	69.9	37.1	139.7	1/2"-13UNCx30.0
	P2	1-1/4"	F10	30.2	58.7	31.8	101.6	7/16" -14UNCx24.0
	P3	01 : 3/4"	F06	22.2	47.6	19.0	74.7	3/8" -16UNCx19.0
		00 : 1"	F08	26.2	52.4	25.4		
	S	4"	F32	77.8	130.2	101.6	115.0	5/8" -11UNCx30.0